Existing Structures: S.N. 099-0302 carrying I-80 Westbound over Houbolt Road was constructed in 1992 as FAI Route 80, Section 99-2(K & HB-1-R). The structure consists of a single-span plate girder beam and reinforced concrete deck superstructure supported by integral abutments. The skew is 14°03'57" forward left.

Stage construction shall be utilized to maintain traffic during construction.


No salvage.

INDEX OF SHEETS

- General Plan, Notes & Total Bill of Material
- 2-3. For Information Only Existing Drainage System Details

TOTAL BILL OF MATERIAL

ITEM	UNIT	SUPER	SUB	TOTAL
Concrete Sealer	Sq. Ft.	10,000	-	10,000
Cleaning Drainage System	L Sum	1	-	1
BONDED Preformed Joint Sealer, 4 Inch	Foot	92	-	92

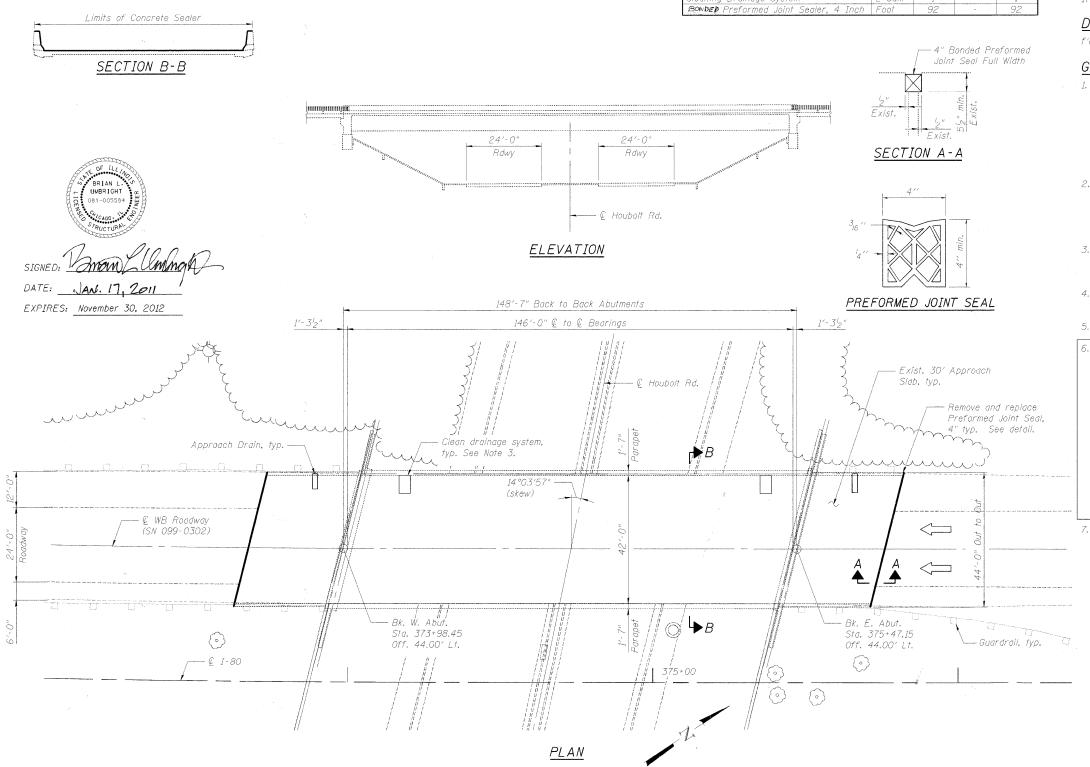

SCOPE OF WORK

- 1. Apply concrete sealer to bridge deck, parapets and approach slabs. . Clean bridge drainage system,
- 3. Remove and replace preformed joint seal at end of approach pavement.

DESIGN SPECIFICATIONS

2002 AASHTO Standard Specifications for Highway Bridges, 17th Edition

DESIGN STRESSES


f'c = 3,500 psi

GENERAL NOTES

- 1. Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.
- 2. Concrete Sealer shall be applied to the bridge deck and the inside vertical and the top horizontal face of parapets, and approach slabs. All surfaces to be sealed should be thoroughly cleaned prior to sealer application. Cost of cleaning is included with Concrete Sealer, see Special Provisions.
- 3. Clean Drainage System shall include bridge deck scuppers and approach slab drainage structures and shall be performed according to Special Provision Cleaning Drainage System.
- 4. Cost of preformed joint seal removal included in the cost of Bonded Preformed Joint Seai, 4".
- 5. See roadway plans for maintenance of traffic requirements.
- 6. Sidewalks adjacent to Hoboult Road are under the jurisdiction of the Forest Preserve District of Will County as part of the Rock Run Trail. The Contractor shall obtain a permit from the Forest Preserve District of Will County for access to the structure or placement of materials or equipment requiring the use of the sidewalks underneath the structure. The cost of the permit and other requirements by the District shall be included in the cost of Clean Drainage System. The Contractor shall contact the Forest Preserve District of Will County prior to starting any work at:

Forest Preserve District of Will County Attn: Deborah Specht Real Estate Manager 17540 W. Laraway Road Joliet, IL 60433 (815) 722-5471

7. Existing pavement markings shall be temporarily covered prior to application of the deck surface treatment, to prevent the material from being applied to the markings. The temporary covering shall be removed after application of the deck surface treatment and prior to opening to traffic. Cost included with Concrete Sealer.



LOCATION SKETCH

F.A.I RTE.	SECTION		COUNTY	TOTAL SHEETS	SHEE
80	99(3&4)RS-4		WILL	117	95
			CONTRACT	NO. 60	DM65
EED DO	AD DICT NO THE THOIC	CCO A	TO ODO JECT		

HBP Illinois Partner

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

REVISED DATE 01/19/201

REVISED

REVISED

REVISED

DESIGNED

DRAWN

LOT SCALE = NTS

CHECKED

JJ

GENERAL PLAN, NOTES & TOTAL BILL OF MATERIAL WESTBOUND FAI-80 OVER HOUBOLT ROAD STRUCTURE NO. 099-0302